



21.5" Open Frame Display Commercial Grade DT22VW2-O



The features:

- 21.5", 1920 x 1080 resolutions
- 250nits, PCAP multi-touch panel
- IP65 dust- and waterproof grade in front panel
- Anti-fingerprint coating glass panel
- Tempered safety glass
- IK08 Impact Protection*
- Quality panel for landscape, portrait mode
- VESA mounting holes 75 x 75mm and 100 x 100mm

**IK08 rated products are protected against 5 joules of impact. This is the equivalent of a 1.7kg mass being dropped from 300mm above the protect.*


Self-Service Kiosk



Industrial Monitor



Smart Locker



EMC and DoC




DT22VW2-O


Dimensions

Unit: mm


Front View

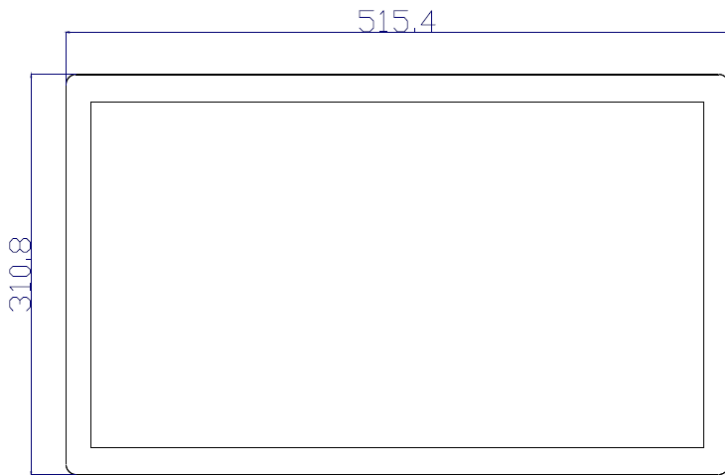

Rear View

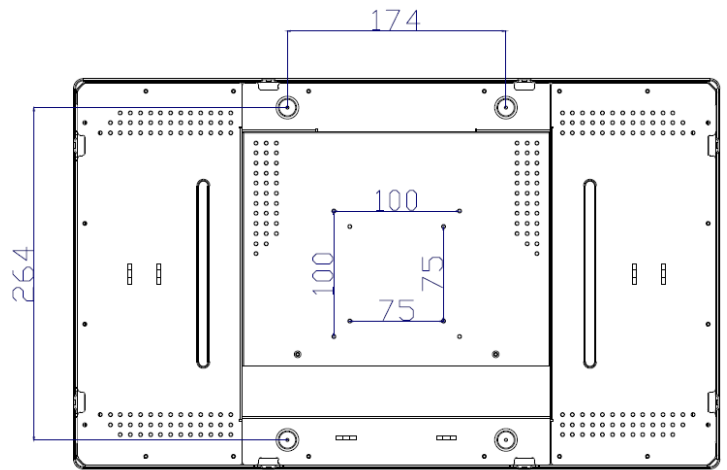

Bottom View



Specifications

| DT22VW2-O | | |
|-------------------------------|-------------------------|--|
| Chassis | Mechanical Design | Metal with implanted IP design |
| | Dimension (W x H x D) | 515.4 x 310.8 x 45.9 mm |
| Thermal Solution | | Fanless technology |
| Panel | Resolution | 21.5", 16:9, 1920 x 1080, 60Hz |
| | Type | VA |
| | Maximum Brightness | 250cd/m2 |
| | Response Time | 12ms |
| | Contrast Ratio | 1000:1 |
| | View Angle (Horizontal) | 85/85 |
| | View Angle (Vertical) | 80/80 |
| | Backlight | LED backlight |
| Touch | Touch Glass | Projected capacitive touch, 21.5 inch, 3.0mm chemically strengthened glass, 7H |
| | Touch Controller | 10 points touch |
| Temperature | Operation | 0°C ~ 50°C (32°F~ 122°F) |
| | Storage | -20°C ~ 60°C (-4°F~ 140°F) |
| OS of Driver Software Support | | Windows, Linux and Android |
| IP Level | | IP65 (front) |
| I/O Interface On Rear Site | | HDMI type A, USB for touch (5V input from USB host), VGA DB-15 female, RJ45 for OSD remoter, DC-in for adapter |
| Net Weight | | 5.88 Kg |
| Mounting | Rear | 75 x 75mm and 100 x 100mm VESA mount |
| | Side | Mounting brackets on all four sides |
| Input Voltage | | DC input 12V/3A |
| Environment | | |
| MTBF | | 30,000hrs demonstrated |
| Relative Humidity | | 90% RH (40°C non-condensing) |
| Certification | | FCC / CE(Class B) / RoHS |
| Warranty | | 3 years |
| Packing | | |
| Dimension (Packing) | | 600 x 395 x 170 mm |
| Gross Weight | | 8.3 Kg |
| Accessory In Box | | HDMI cable, USB cable, OSD remote, AC cable, Adapter, Side mount bracket x8, M4 screws x16, M3 screws x16 |

*Please note that product specifications are subject to change without notice



AOPEN Headquarter
New Taipei City,
Taiwan

AOPEN America
San Jose,
USA

AOPEN Europe
Rosmalen,
Netherland

AOPEN Australia
Melbourne,
Australia

AOPEN Japan
Tokyo,
Japan

AOPEN China
Shanghai,
China