



# AOPEN

an Acer Group Company



# AOPEN Chromebox Commercial 3


*Powerful, Commercial Grade ChromeOS Device, that drives up to 4 x 4k screens*

Crafted with a specific purpose in mind, the meticulous design of the AOPEN Chromebox Commercial 3 addresses a wide range of unique applications across various sectors, including enterprise, digital signage, quick service, retail, education, and government.

Featuring a ruggedized design crafted from aluminum and SECC metal, the AOPEN Chromebox Commercial 3 offers a non-venting hole design, ensuring durability and reliability. It operates without fans or internal moving parts, making it ideal for 24/7 use in public spaces. With support for up to 4 x 4K2K 60Hz UHD video playback and a wide operating temperature range of 0°C to 50°C. Additionally, it supports kiosk and vending applications with an external power switch and features AC Power Auto Recovery (APAR) for uninterrupted operation. The Chromebox Commercial 3 comes with a standard 3-year warranty, with the option to extend it to 5 years. The AOPEN Chromebox Commercial 3 is a versatile choice.

*The advantages of the AOPEN Chromebox Commercial 3:*

- Runs 4 UHD (4k) display @60Hz in commercial grade
- 24/7 Operability in public spaces
- Small form factor for easy installment behind displays or integration in kiosks, comes with L-shaped mount
- Design to operate in a wide environmental temperature range of 0°C~50°C
- The solid-state and fanless design ensure a first-rate performance in challenging or moving situations.
- AC Power Auto Recovery (APAR)
- Included dual band antenna offers a wide reach
- Support White Glove Service, zero-touch enrollment and Health Service (healthd)
- The AOPEN Chromebox Commercial 3 comes with a 3 year warranty, extended warranty optional for 5 year

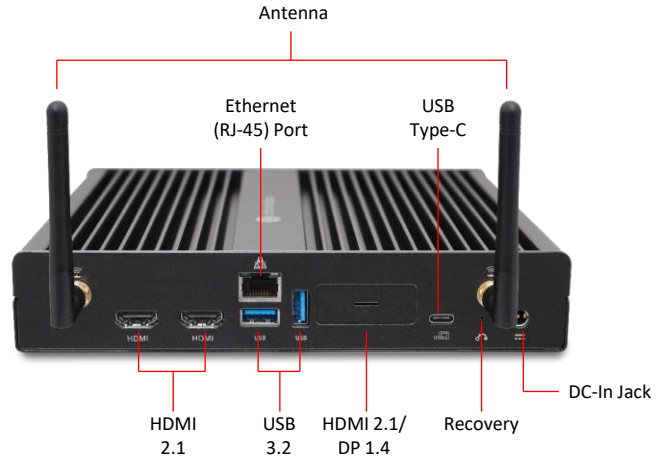

# AOPEN Chromebox Commercial 3

OS		ChromeOS				
Dimension	W x H x D (mm)	200 x 38 x 186.2 mm (1.42L)		Front Panel I/O	USB 2.0 Port	-
	W x H x D (inch)	7.87 x 1.49 x 7.33 inch (1.42L)			USB 3.2 Port	3.2 Gen 2 X2 (BC1.2 charging, 5V/1.5A)
Weight	Net Weight	1.64 kgs / 3.62 lbs			USB Type-C	X1 (USB4 Gen 3 Data transfer/Power Delivery 15W/DisplayPort)
	Gross Weight	2.63 kgs / 5.79 lbs			Others	Audio Jack x1, Power Button x1, External Power Switch x1
CPU	Type	Intel® Celeron 7305 Processor, Core I3-1215U		Rear Panel I/O	DC Jack	X1
Memory	Channels	Dual Channel			HDMI 2.1 Port	X2
	Type	DDR4 SO-DIMM x2			USB2.0 Port	-
	Data Rate	3200 MHz			USB 3.2 Port	Gen 2 x 2
	Max Memory	4G/8G (4Gx2)			USB Type-C	x1 (USB4 Gen 3 Data transfer /Power Delivery 15W/DisplayPort)
Graphics		Intel® Iris Xe Graphics, integrated on CPU			RJ45 LAN Jack	X1
Audio		3.5 Audio Jack X1 (Combo)			Antenna Holes	X2
LAN		Giga Lan x 1, 10/100/1000Mbps			Kensington Lock Hole	X1
Wireless		WiFi 6E 802.11 b/g/n/ac/ax + BT5.2			Recovery Holes	X1
Storage Bay	2.5" SATA HDD	-			Others	Configurable Port: HDMI2.1 / DP1.4a (Optional)
	M.2 SSD	EMMC 64G/128G		Power Supply	DC Adapter 19V/90W	
				Input Voltage	AC 100 ~ 240V	
<b>Environment</b>						
				MTBF	50,000 hrs	
				Operating Temperature	0°C ~ 50°C (32°F ~ 122°F)	
				Storage Temperature	-20°C ~ 60°C (-7°F ~ 140°F)	
				Relative Humidity	95% RH max	



\*Please note that product specifications are subject to change without notice

