#### cTILE 15 Gen 2






# Commercial Chrome All-in-One

15.6" | Fanless | IP65 | Glove Touch

## cTILE 15 Gen2

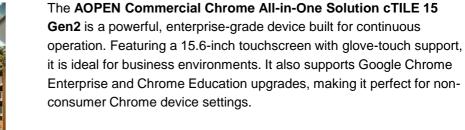






#### Features:

- · Ruggedized design
- Front panel IP65 dust and water resistant
- 15.6" at 1920x1080 px (16:9)
- 250 nits, VA panel
- VESA compatible mount (100 x 100)
- · Tamper proof, fanless, and solid-state design
- Glove touch support Nitrile / Latex
- Supports Chrome Device Management

### cTILE 15 Gen2

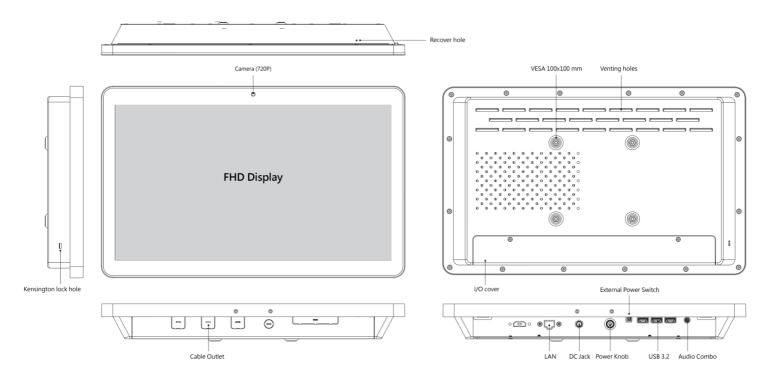

Model name		cTILE 15 Gen2
Housing Material		Metal/Plastic
Dimensions	W x H x D (mm)	397 x 247 x 49 mm
	W x H x D (inch)	15.63 x 9.24 x 1.93 inch
Weight	Net Weight	3.84 kg / 8.47 lb
	Gross Weight	5.5 kg / 12.13 lb
System	CPU	Intel® Celeron
	Memory	8GB
	Graphics	Intel HD graphic, integrated on CPU
	Audio	Audio combo jack x1
	WLAN	WIFI 6E 802.11 b/g/n/ac/ax + BT5.2, dual band
	Storage	EMMC 32G
	Resolution	15.6" 1920 x 1080 (16:9)
	Maximum Brightness	250 nits
	Panel Type	VA
Front Panel	Viewing angle	178°/178°
	Response time	22ms
	Contrast Ratio	1000:1
	Touch	10 points PCT touch
	Camera	720P
	IP Grade	Front IP65 / Rear IPX2

I/O	Power Butte	on (Hidden)	x 1	
	DC Jack		x 1	
	HDMI Out P	ort	-	
	USB 3.2 Po	rt	x 3	
	RJ45		x 1 (Ethernet 1000/100/10)	
	Audio Set	Line-Out	Audio Combo Jack x 1	
		Mic-in		
	'		Kingston lock (slot) x 1	
	Others		External Power Switch x 1	
			Recovery hole x 1	
Others	Adapter		90W	
	Input Volta	ge	DC19V	
	Security		Google TPM, Kensington lock	
	Warranty		3 years	
	Optional		Slim type VESA mount, T<11mm	
Environment				
MTBF			50000 hours	
Operating Temperature			0 ~ 40°C (32 ~ 104°F)	
Storage Temperature			-20 ~ 60°C (-4 ~ 140°F)	
Relative Humidity			90% RH max	

Supports:



